

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number
WO 02/44608 A1

(51) International Patent Classification⁷: **F16L 47/00**

(21) International Application Number: PCT/GB01/05295

(22) International Filing Date:
29 November 2001 (29.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0029037.9 29 November 2000 (29.11.2000) GB

(71) Applicant (for all designated States except US): **UPONOR INNOVATION AB** [SE/SE]; Industrievägen, S-51381 Fristad (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only):
CHRISTODOULOU, Mario, John [GB/GB]; 9 Thurlow Court, Nettleham Park, Lincoln LN2 4SA (GB).
BOWMAN, Jeremy [GB/GB]; 171 Somersall Lane, Chesterfield S40 3NA (GB).

(74) Agents: **POTTER, Vanessa, J.**; Harrison Goddard Foote, Fountain Precinct, Leopold Street, Sheffield S1 2QD et al. (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: TAPPING FITTING

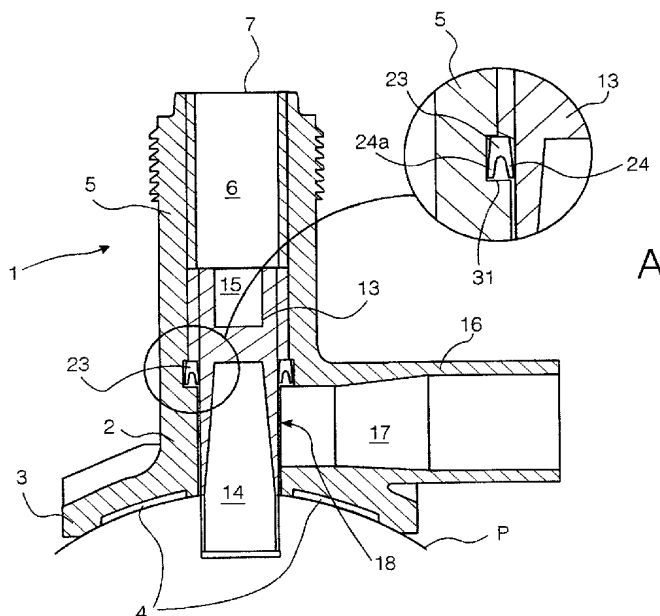

(57) **Abstract:** Tapping fitting (1) suitable for application to a plastic pipe (P), comprising: a housing (5) including a hollow main section (6), the housing being attachable to a pipe (P); a cutter assembly (13) mountable within the hollow main section (6) and axially moveable therein into a cutting position wherein the cutting blade (14) engages the surface of a pipe (P) to which the fitting is attached; and a direct seal (23) between the housing (5) and the cutter assembly (13), wherein, in use, the seal (23) is maintained between the housing (5) and the cutter assembly (13) regardless of the axial position of the cutter assembly (13) within the housing (5).



WO 02/44608 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TAPPING FITTING

This invention relates to the field of a tapping fitting or tapping tee for application to a pipe in order to create a branch conduit for example. The tapping fitting is particularly, but not exclusively, suitable for use in electrofusion fittings for plastic pipes.

A known tapping fitting is described in EP0754900 (Plasson) in which a rotatable blade assembly has an externally-threaded head which is used to advance a threaded cutting blade down the inside of the main body of the fitting towards the pipe to be cut.

The external thread on the head and the corresponding thread on the interior of the body need to be of relatively narrow pitch which requires precision in manufacture. The thread can be machined for maximum accuracy but this is a necessarily expensive manufacturing procedure. Alternatively, the threaded body could be moulded around a threaded core, but this requires the core to be spun-off or unscrewed from the body thus produced, which is time-consuming especially if the thread is long.

The components of the known tapping fitting need to be deburred before use, because of the high accuracy of thread required and this is also a time-consuming process.

Furthermore, this type of fitting is time-consuming to manufacture because of the need to screw the rotatable blade assembly into the main body thread.

A further significant problem with tapping fittings

occurs due to the fact that the fittings are used to tap into high pressure liquid or gas supply pipes which results, in use, with the tapping fitting leaking pressurised liquid or gas during and/or after the cutting operation. In particular, the gas or liquid can leak past the screw thread of a threaded tapping fitting, this problem being commonly known as "blow-back" or "blow-by".

EP0754900 (Plasson) alleviates the problem of blow-by by the provision of O-ring seals 46 and 50 (see Figures of Plasson) in conjunction with a moulding (hollow stem 4). As can be seen from Plasson, the hollow stem 4 is sealed with respect to the cutter assembly 3 by means of O-ring 46 (see Figure 5). The hollow stem 4 is sealed with respect to the housing main section 20 by O-ring 50 (see Figure 4). Both O-rings and the hollow stem are required in order to seal possible leakage paths effectively. This arrangement is relatively complex and therefore expensive to manufacture. Furthermore, because the final sealing takes place relatively near the top of the housing main section 20, the housing main section (or "stack") is necessarily under the same pressure as the main pipe, once the main pipe has been cut. Therefore the stack must be sufficiently strong to withstand these stresses over the designated lifetime of the fitting.

A fitting manufactured by Friatec (formerly known as Friedrichsfeld) and illustrated on page 6 of their catalogue reference number 1457 e.2.XI.91 Mz alleviates some of the problems with Plasson. This fitting 100 is illustrated in longitudinal cross-section in Figures 1 and 1A.

The Friatec fitting 100 comprises a machined metal insert 101 which has an internal thread 101a. A metal cutter

102 is provided which has an external thread 102a provided thereon. The internal thread 101a of the insert engages with the external thread 102a of the cutter. The metal insert 101 is over moulded into the main section of the fitting housing (the "stack") 103. An O-ring seal is located in the lower region of the threaded insert 101 and, in use, is biased onto the cutter 102 so as to reduce the likelihood of blow-by. It can be seen from figure 1 that the O-ring seal 104 is located in a recess 105 which is machined into the insert for that purpose. By locating the O-ring seal 104 at the lowermost region of the stack 103, stresses on the stack are reduced, giving an advantage over the Plasson fitting.

However, the Friatec fitting is difficult and therefore expensive to manufacture because of its complexity. The fitting 100 includes four precision components - the cutter itself 102 having an external screw thread, and secondly the internally-threaded metal insert 101 which has to be overmoulded into the housing main section 103 and assembled with the threaded cutter. It is difficult to install the O-ring seal 104 in the insert because the seal is retained in a recess 105 designed for the purpose so that the seal is constrained top and bottom. Thirdly, the Friatec fitting comprises a separate machined upper portion 106 which is also internally threaded and overmoulded into the housing main section so that it interacts with the threaded insert to resist axial movement thereof. Finally, there is an end cap 107 with its own external screw thread and O-ring seal. Overall therefore the Friatec fitting represents complex apparatus which is necessarily expensive to produce.

It is thus an object of the present invention to provide a tapping fitting which alleviates the problems of the

prior art.

According to a first aspect of the present invention,
there is provided a tapping fitting, suitable for
5 application to a plastic pipe, comprising:

a housing including a hollow main section, the
housing being attachable to a pipe;

a cutter assembly mountable within the hollow main
section and axially moveable therein into a cutting
10 position wherein the cutting blade engages the surface of
a pipe to which the fitting is attached; and

a direct seal between the housing and the cutter
assembly, wherein, in use, the seal is maintained between
the housing and the cutter assembly regardless of the
15 axial position of the cutter assembly within the housing.

By using a direct seal, i.e. a single seal between the
housing and cutter assembly, the number of parts is
reduced as (unlike in Plasson) only one seal, and no
20 "hollow stem" or other intermediate element is required.
Also (unlike in Friatec) the simple construction means
that the seal can simply be dropped into place from the
top of the stack during assembly rather than needing to
be fitted into a specially-constructed recess in the
25 insert.

Furthermore, because sealing takes place much lower down
the stack, the stack itself is not subjected to the
stresses imposed by the pressurised gas or liquid in the
30 main pipe. This leads to an extended fitting lifetime
for a given pressure, or the ability to use a thinner
wall section in the stack.

Preferably, the seal comprises a resilient ring, biased
35 against the cutter assembly. Ideally, the seal is a U-

seal, lip seal, O-ring or the like. Preferably the seal is servo-acting.

According to a second aspect of the present invention
5 there is provided a tapping fitting, suitable for application to a plastic pipe, comprising:

a housing including a hollow main section, the housing being attachable to a pipe;

an internally-threaded insert, mountable within the
10 hollow main section; and

a cutter assembly comprising a cutting blade attached to a non-deformable cutter body, the cutter body having an external screw thread and being mountable within the internally-threaded insert and axially
15 moveable therein into a cutting position wherein the cutting blade engages the surface of a pipe to which the fitting is attached,

the arrangement being such that upward axial forces imposed on the insert through the cutter assembly when
20 the cutting blade cuts the pipe are prevented from axially moving the insert in the hollow main section by interference between the regions of the insert and hollow main section, said non-deformable cutter body supporting the insert against deformation in said regions when the
25 cutting blade cuts the pipe.

According to a third aspect of the invention, there is provided a tapping fitting, suitable for application to a plastic pipe, comprising:

30

a housing including a hollow main section, the housing being attachable to a pipe;

an internally-threaded insert, mountable within the
35 hollow main section; and

a cutter assembly having an external screw thread, mountable within the internally-threaded insert before the insert is mounted within the housing, the insert
5 being such that the cutter assembly can be mounted therein by substantially surrounding the cutter assembly with the insert and without the need to rotate the insert or the cutter assembly with respect to one another.

10 Preferably, the insert comprises two halves of a longitudinally-sectioned cylinder, the two halves being hinged together.

Alternatively, the insert comprises a plurality of
15 longitudinal sections of a cylinder.

Alternatively, or in addition, the insert further comprises a plurality of protrusions on its external surface which provide a means of mechanical fixture and
20 improve a friction fit of the insert within the main section of the housing.

Preferably, the insert further comprises one or more longitudinal external protrusions which, in use, act to
25 prevent axial rotation of the insert within the main section of the housing.

Preferably, the insert is made of plastic, for example, polyethylene, polypropylene or PVC. Alternatively, the
30 insert is made of metal, for example brass or stainless steel.

Preferably, the fitting further comprises a seal between the housing and the cutter assembly. Advantageously, the
35 seal comprises a resilient ring, biased against the

cutter assembly. Ideally, the seal is a lip seal, an O-ring or the like.

According to a fourth aspect of the invention there is
5 provided an insert for a tapping fitting as described in any of the preceding paragraphs.

Preferred embodiments of the present invention will now
be more particularly described, by way of example only,
10 with reference to the accompanying drawings in which:

Figure 1 is a cross-sectional side view of part of a prior art fitting;

15 Figure 1A is an exploded cross-sectional view of the metal component parts of the prior art fitting illustrated in Figure 1;

Figure 2 is a schematic view of a tapping fitting
20 embodying the first aspect of the invention, with the cutter assembly at the bottom of its stroke, the tapping fitting having a seal;

Figure 2A, drawn to an enlarged scale, shows detail of
25 the seal;

Figure 3 shows the tapping fitting of Figure 2 with the cutter assembly at the top of its stroke;

30 Figure 3A, drawn to an enlarged scale, shows detail of the seal illustrated in Figure 3.

Figure 4 is a cross-sectional side view of a fitting according to the second and third aspects of the present
35 invention, with the cutter assembly at the top of its

stroke;

Figure 4A, drawn to an enlarged scale, shows detail of the seal illustrated in Figure 4.

5

Figure 5 shows the tapping fitting of Figure 4 with the cutter assembly at the bottom of its stroke;

Figure 5A, drawn to an enlarged scale, shows detail of the seal illustrated in Figure 5.

10

Figure 6 is a top view of the tapping fitting of Figures 4 and 5;

15 Figure 7 is a front view of the insert; and

Figure 7A is a top view of the insert.

Figures 2, 2A, 3 and 3A show a tapping fitting according to the first aspect of the invention.

20

The tapping fitting 1 comprises a housing 2 which has a saddle-shaped lower portion 3 which can be fused to a pipe P by means of electrofusion elements 4. Connectors 19 for the electrofusion elements are shown in Figure 6. The cylindrical main section 5 ("the stack") of the housing is upstanding from the saddle-shaped portion and is hollow, having a bore 6 leading from a top opening 7, down to the surface P of the pipe.

30

The housing 2 further comprises a branch connector 16 to which can be attached the auxiliary pipe which it is desired to join to the main pipe P. The branch connector 16 has a bore 17 therethrough which joins bore 6 of the fitting at junction 18.

35

A cutter assembly comprises a cutter body 13 and a cutting blade 14. The cutter body has a screw thread on the external surface thereof, which in use engages with a screw-thread on the internal surface of the main cylindrical section 5. Thus, by rotating the cutter assembly, the cutting blade 14 can be advanced towards or retracted away from the surface of the pipe P.

10 A keyhole 15 is located in the upper surface of the cutter body. The keyhole 15 is of polygonal cross-sectional shape, for example hexagonal or square, and is intended to receive therein a correspondingly-shaped key (not shown) with which an operator can rotate the cutter assembly about the longitudinal axis of the main section of the housing.

By rotating a key in the keyhole 15, the cutter assembly can be advanced towards the pipe P until a cutting position is reached, in which the cutting blade 14 engages the pipe P. Further advancement of the cutter assembly causes the blade 14 to cut into the surface of the pipe P and, eventually, through to the interior thereof. At this stage, a cylindrical piece of plastic 25 30 (a coupon, plug or slug) has been cut from the pipe P and is retained in the cutting blade 14. This makes an effective seal in the bore of the cutter, which is needed if there is a pressure testing aperture in the cutter body. By reversing the direction of rotation of the key, 30 the cutter assembly can be retracted away from the pipe P. Once the cutting blade 14 has been retracted fully past the junction 18 with the branch connector 16 (as shown in Figure 3), the tapping operation is complete as a conduit has now been formed between pipe P and the 35 auxiliary pipe (not shown) connected to the branch

connector 16.

The fitting also comprises an annular seal 23 located within the main section of the housing. The seal 23 has
5 a resilient inner portion 24 which is normally biased against the cutter assembly so as to prevent "blow-by" i.e. the undesirable escape of liquid or gas from the main pipe P out of the top opening 7 of the tapping fitting.

10

This arrangement has the advantage over the prior art that a single seal is used, sealing directly between the cutter assembly and the housing. Since the seal 23 is
15 biased against the cutter assembly, the seal is maintained even as the cutter assembly moves axially with respect to the housing. In this way, the seal 23 is equally effective regardless of the actual vertical position of the blade.

20 Provision of the seal 23 also has the added advantage of prolonging the life of the tapping fitting or facilitating the use of thinner wall sections, as the stack 5 is not subjected to the pressure from the liquid or gas in the main pipe P during and after the cutting
25 operation.

The seal 23 is preferably a U-seal, as illustrated. This has the advantage of being servo-acting, i.e. the pressurised gas in the main pipe which is trying to leak
30 past the seal does, in fact, increase the sealing capability by urging the lowermost "arms" 24, 24a of the seal outwardly away from one another.

The invention has a further advantage in that
35 manufacturing of the fitting is greatly simplified

compared with, for example, the Friatec fitting. A ledge 31 is formed within the housing, onto which the seal 23 can simply be dropped during assembly of the fitting. This is possible because the seal 23 needs to be in
5 direct contact with the housing 2, unlike in the Friatec fitting wherein the seal is located within a specially-formed recess machined into a metal insert which, in turn, is located (by overmoulding) within the housing main section.

10

However, other types of seal may be employed, for example an O-ring seal or a lip seal.

A tapping fitting according to the second and third
15 aspects of the invention is shown in Figures 4 and 5.

In this tapping fitting, a polyethylene (or other suitable material) insert 8, described in more detail below, is inside the main section of the housing. The
20 separately manufactured or moulded insert 8 is substantially cylindrical in shape and has annular ribs 9 protruding from its outer surface which help to maintain the mechanical/friction fit of the insert inside the housing. Other shaped protrusions, ribs or the like may
25 be envisaged.

The interior surface of the insert 8 is provided with a screw-thread 10 and the uppermost region has a reduced internal diameter 11 so as to act as a means of retaining
30 and providing access to the cutter assembly with the tool. The aperture provided is concentric with the opening 7 of the housing 2.

The cutter body 13 is non-deformable and is made of
35 brass, for example. Alternatively, the cutter body could

be made of non-deformable plastics. The cutter body has a screw thread on the external surface thereof, which in use engages with the screw-thread 10 on the internal surface of the insert 8. Thus, by rotating the cutter
5 assembly, the cutting blade 14 can be advanced towards or retracted away from the surface of the pipe P.

A key feature of this tapping fitting relates to the interaction of the cutter body 13 with the insert 8
10 during the cutting operation. When the cutter assembly reaches the cutting position, the pipe P resists the cutting action and axial forces are applied to the blade 14 and cutter body 13. This force is also applied to the insert 8, whose screw thread is engaged with that of the
15 cutter body 13. This may result in a tendency for the insert and cutter assembly to be urged axially away from the surface of the pipe P. However the presence of the ribs 9 means that the insert is jammed against the non-deformable cutter body 13 so that the insert 8 cannot
20 deform inwardly, which would release the ribs 9 from the wall of the housing. The tapping fitting is so dimensioned that, when the cutter assembly reaches the cutting position, the non-deformable cutter body 13 is adjacent a region of the insert 8 which has ribs 9. It
25 is not necessary for the entire length of the insert 8 to be provided with ribs 9, as shown in Figures 4 and 5.

The construction of the insert 8 is shown in more detail in Figures 7 and 7A. The insert is made from
30 polyethylene, polypropylene or PVC, for example. The moulded plastic insert 8 comprises two halves 20, 21 of a cylinder, which has been sectioned i.e. bisected longitudinally. The two halves 20, 21 may be joined longitudinally by a knife edge hinge 22 and can therefore
35 be "closed" into a cylinder when required by hinging the

halves together.

This construction has the significant advantage that, when it is required to assemble the cutter assembly and
5 insert 8, one half 20 of the insert 8 can simply be placed adjacent to the cutter assembly, the screw threads aligned, and the other half 21 "closed" around the cutter assembly. This avoids the time-consuming necessity to
10 screw the cutter assembly down into the insert during assembly, which would be required if the insert was a one-piece cylinder.

A second advantage this construction offers is that the thread can be manufactured more cost effectively and by
15 more reliable processes, for example injection moulding.

The insert need not necessarily be in the form of a bisected and hinged cylinder as illustrated in Figures 7 and 7A. In an alternative embodiment (not illustrated),
20 the insert may comprise a plurality of longitudinal sections of a cylinder which are not joined together, but which can be placed around the cutter assembly, with their screw threads aligned.

25 It is intended that the body 13 of the cutter assembly should be surrounded by the upper region of the insert 8 when the two are assembled together, so that the cutter body 13 is not adjacent the annular ribs 9.

30 When the cutter assembly and insert are assembled as described above, they are inserted together into the main section 5 of the housing 2. The cutter assembly and insert are pushed into the bore 6 so as to form a friction mechanical fit therein. The lower region of the
35 insert (i.e. the region not adjacent the cutter body) may

deform inwardly during insertion as a result of the protruding ribs 9.

One or more longitudinal external protrusions (not
5 illustrated) may be provided on the insert 8 to prevent the friction/mechanically fitted insert from rotating axially within the housing when the key is used to rotate the cutter assembly.

10 Alternatively, or in addition to the friction/mechanical fit, a supplementary means of fastening the threaded sleeve to the main body 2 may be employed. For example the insert 8 may be fused into the housing.

15 When the tapping fitting is in use, as the cutter body 13 is initially advanced towards the pipe P, it will be in the upper region of the insert 8 and hence not adjacent any of the ribs 9. As the non-deformable cutter body reaches the region of the ribs, any inward radial
20 movement of the insert will be resisted, ensuring that the ribs remain urged firmly into the wall of the housing. This benefit becomes more apparent, as already described above, when it is desired to resist the forces induced during cutting. Because the cutter body is non-
25 deformable, the adjacent region of the insert (and the ribs attached thereto) can only move more firmly into the wall of the housing, thus resisting the tendency of the insert to move axially away from the pipe P.

30 The tapping fitting may also, optionally, include the "zero blow-by" feature described above. A U-seal 23 is provided and can simply be dropped onto ledge 31 during assembly. There is no need for any special recess to be formed in the insert or the housing to receive the seal
35 and the seal 23 seals directly between the housing and

the cutter, which has the advantages outlined above.

CLAIMS

1. Tapping fitting suitable for application to a plastic pipe, comprising:

5

a housing including a hollow main section, the housing being attachable to a pipe;

10 a cutter assembly mountable within the hollow main section and axially moveable therein into a cutting position wherein the cutting blade engages the surface of a pipe to which the fitting is attached; and

15 a direct seal between the housing and the cutter assembly, wherein, in use, the seal is maintained between the housing and the cutter assembly regardless of the axial position of the cutter assembly within the housing.

20 2. Tapping fitting as claimed in claim 1 wherein the seal comprises a resilient ring, biased against the cutter assembly.

25 3. Tapping fitting as claimed in claim 1 or claim 2 wherein the seal is a U-seal, lip seal, an O-ring or the like.

4. Tapping fitting as claimed in any of the preceding claims wherein said seal is a servo-acting seal.

30 5. Tapping fitting, suitable for application to a plastic pipe, comprising:

a housing including a hollow main section, the housing being attachable to a pipe;

35 an internally-threaded insert, mountable within the hollow main section; and

a cutter assembly comprising a cutting blade attached to a non-deformable cutter body, the cutter body having an external screw thread and being mountable within the internally-threaded insert and axially moveable therein into a cutting position wherein the cutting blade engages the surface of a pipe to which the fitting is attached,

the arrangement being such that upward axial forces imposed on the insert through the cutter assembly when the cutting blade cuts the pipe are prevented from axially moving the insert in the hollow main section by interference between the regions of the insert and hollow main section, said non-deformable cutter body supporting the insert against deformation in said regions when the cutting blade cuts the pipe.

6. Tapping fitting, as claimed in claim 5, wherein the cutter assembly is mountable within the internally-threaded insert before the insert is mounted within the housing, the insert being such that the cutter assembly can be mounted therein by substantially surrounding the cutter assembly with the insert and without the need to rotate the insert or the cutter assembly with respect to one another.

7. Tapping fitting as claimed in claim 5 or claim 6 wherein the insert comprises two halves of a longitudinally-sectioned cylinder, the two halves being hinged together.

8. Tapping fitting as claimed in claim 5 or claim 6 wherein the insert comprises a plurality of longitudinal sections of a cylinder.

9. Tapping fitting as claimed in any of claims 5-8

wherein the insert further comprises a plurality of protrusions on its external surface which provide a means of mechanical fixture and improve a friction fit of the insert within the main section of housing.

5

10. Tapping fitting as claimed in any of claims 5-9 wherein the insert further comprises one or more external protrusions which, in use, act as an axial stop to prevent rotation of the insert within the main section of the housing.

10

11. Tapping fitting as claimed in any of claims 5-10 wherein the insert is made of plastic, for example, polyethylene, polypropylene or PVC.

15

12. Tapping fitting as claimed in any of claims 5 to 10 wherein the insert is made of metal, for example brass.

13. Tapping fitting as claimed in any of claims 5-12 wherein the fitting further comprises a direct seal between the housing and the cutter assembly.

20

14. Tapping fitting as claimed in claim 13 wherein the seal comprises a resilient ring, biased against the cutter assembly.

25

15. Tapping fitting as claimed in claim 13 or claim 14 wherein the seal is a U-seal, lip seal, O-ring or the like.

30

16. Tapping fitting as claimed in any of claims 13-15 wherein said seal is servo-acting.

17. Tapping fitting, suitable for application to a plastic pipe, substantially as described herein with

35

reference to any appropriate combination of Figures 2-7A.

18. Insert for a tapping fitting as claimed in any of
5 claims 5-17.

19. Insert for a tapping fitting substantially as
described herein with reference to any appropriate
combination of Figures 2-7A.

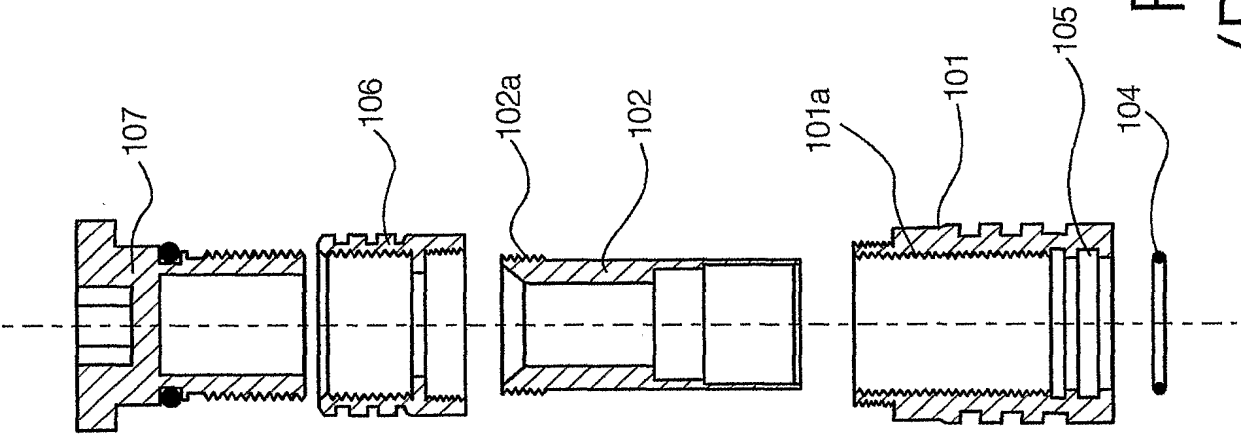


Fig. 1A
(Prior Art)

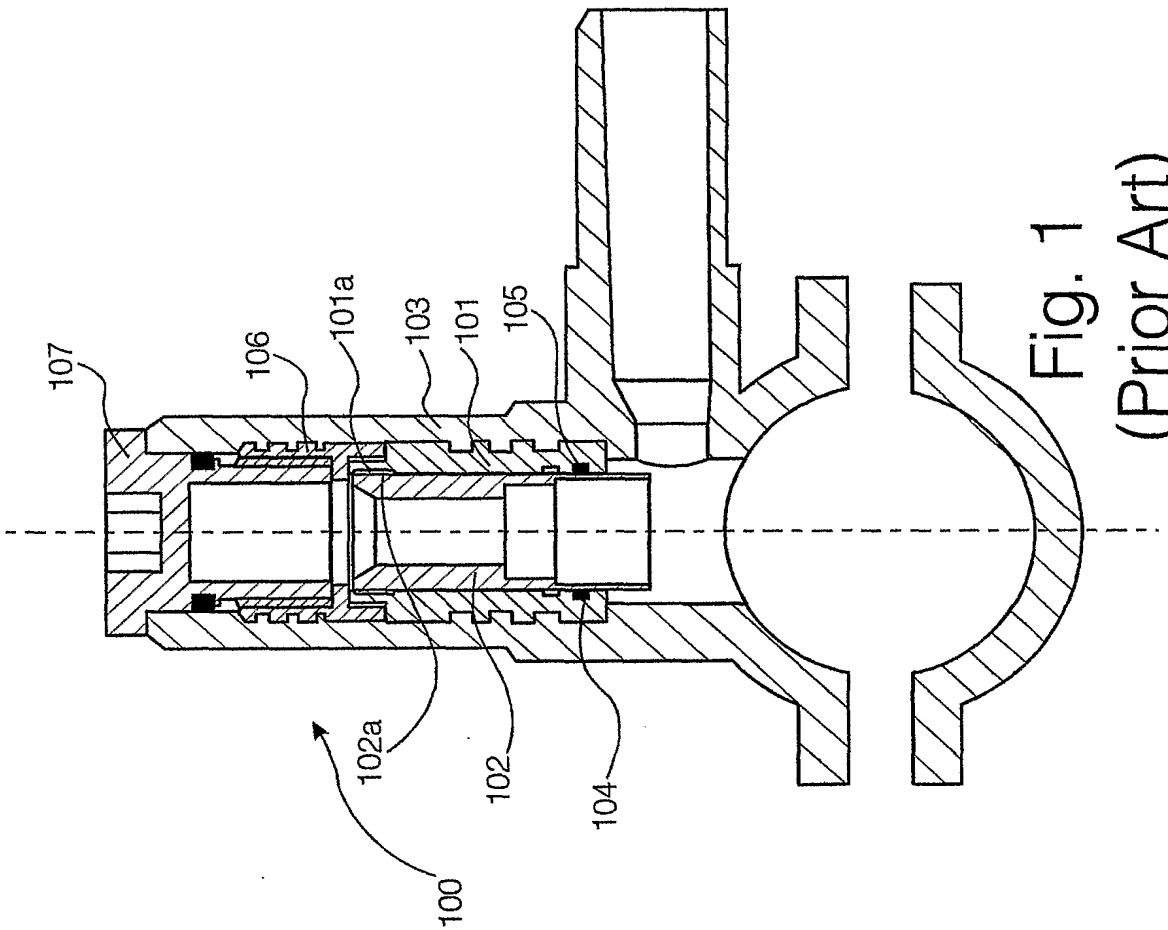
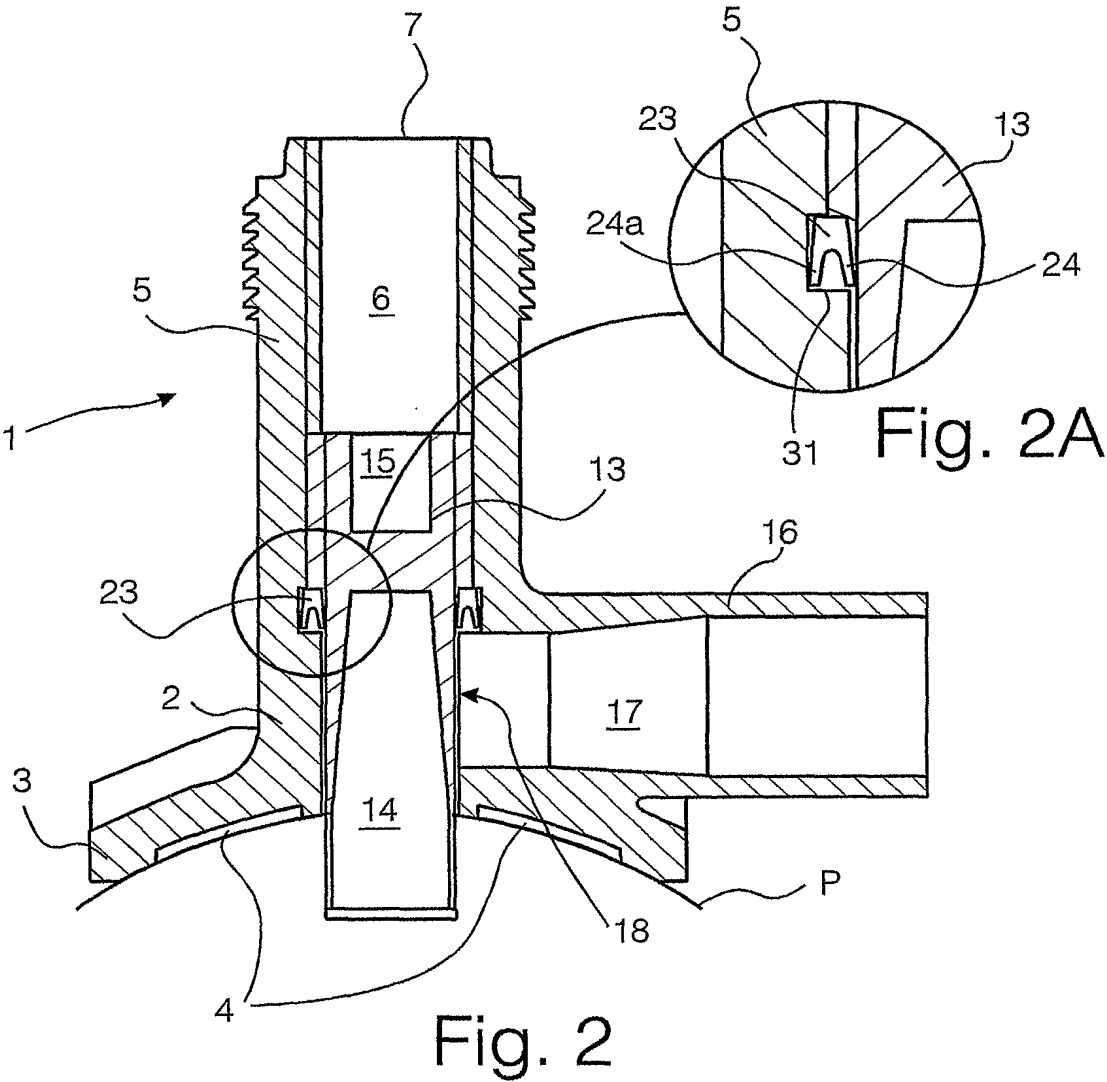


Fig. 1
(Prior Art)



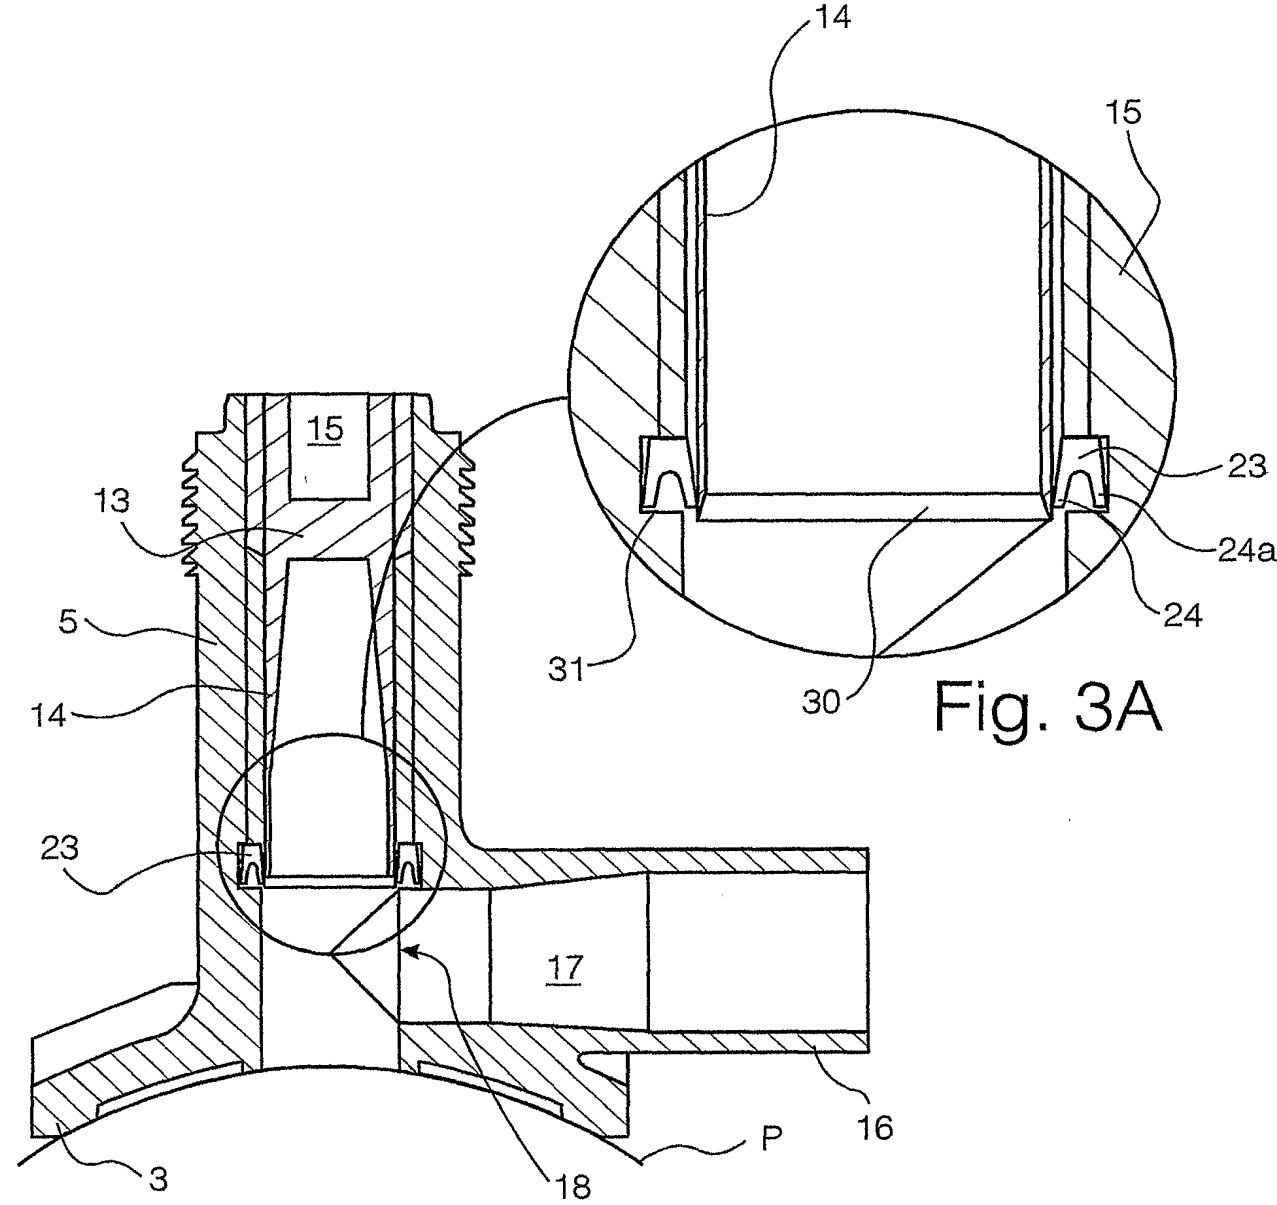


Fig. 3

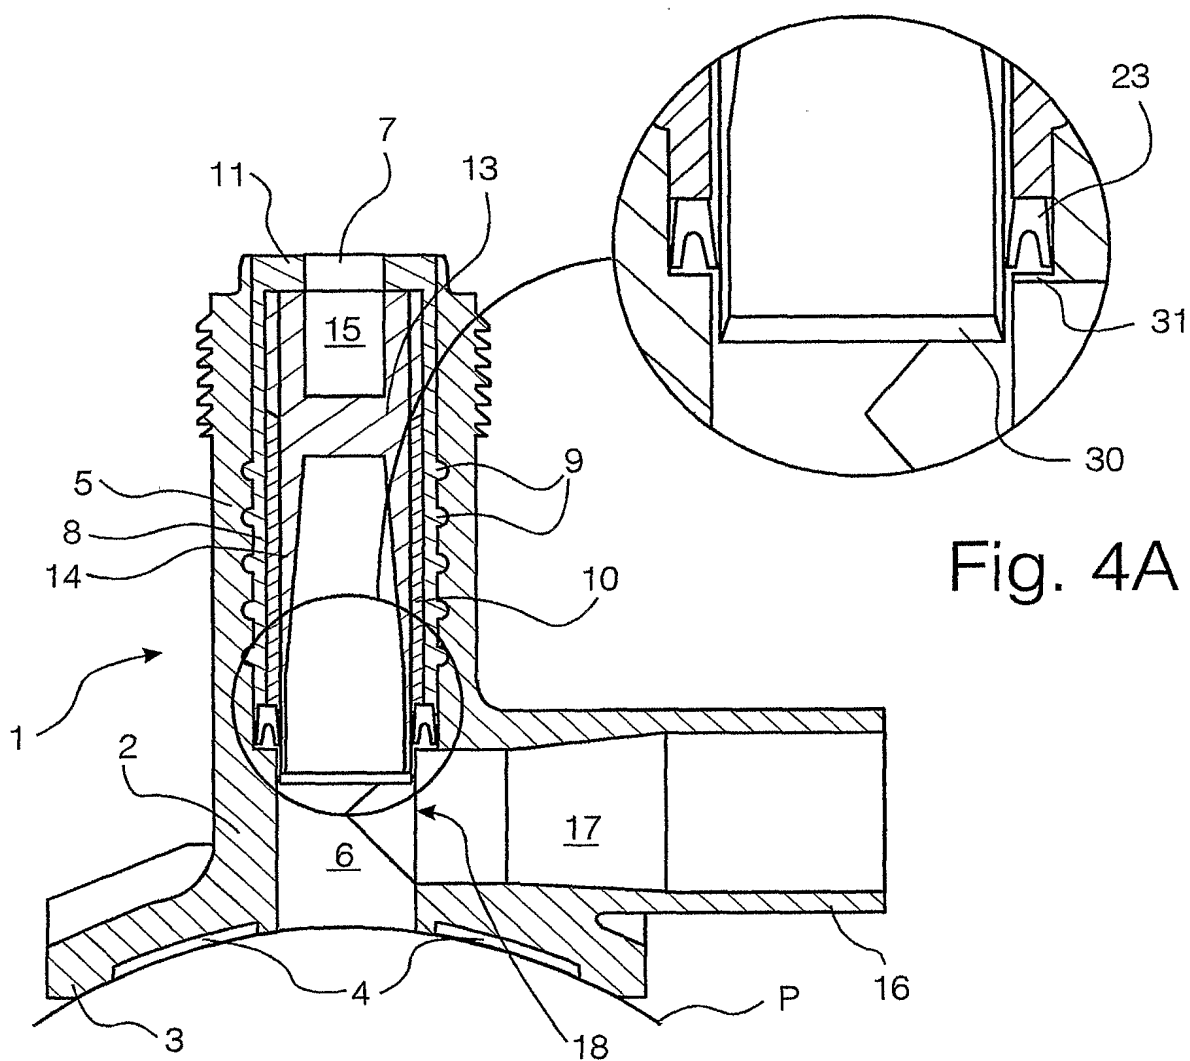


Fig. 4

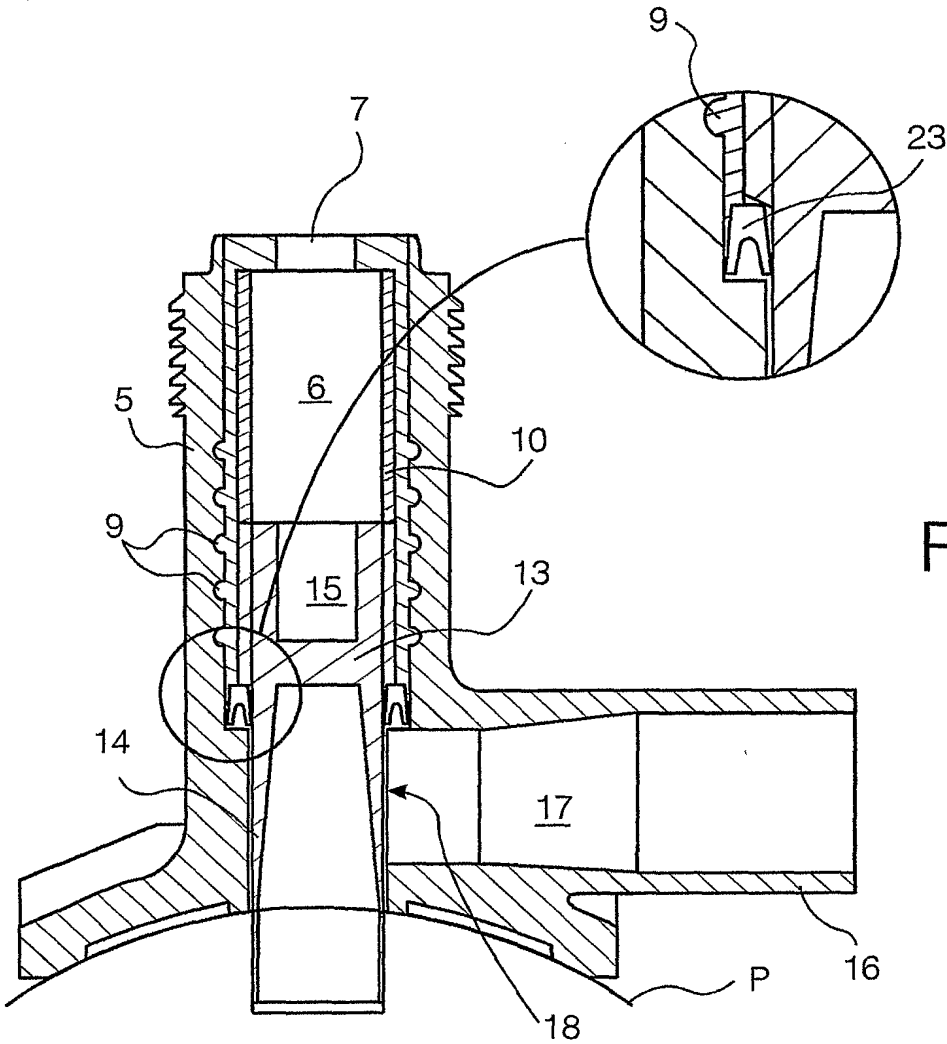


Fig. 5A

Fig. 5

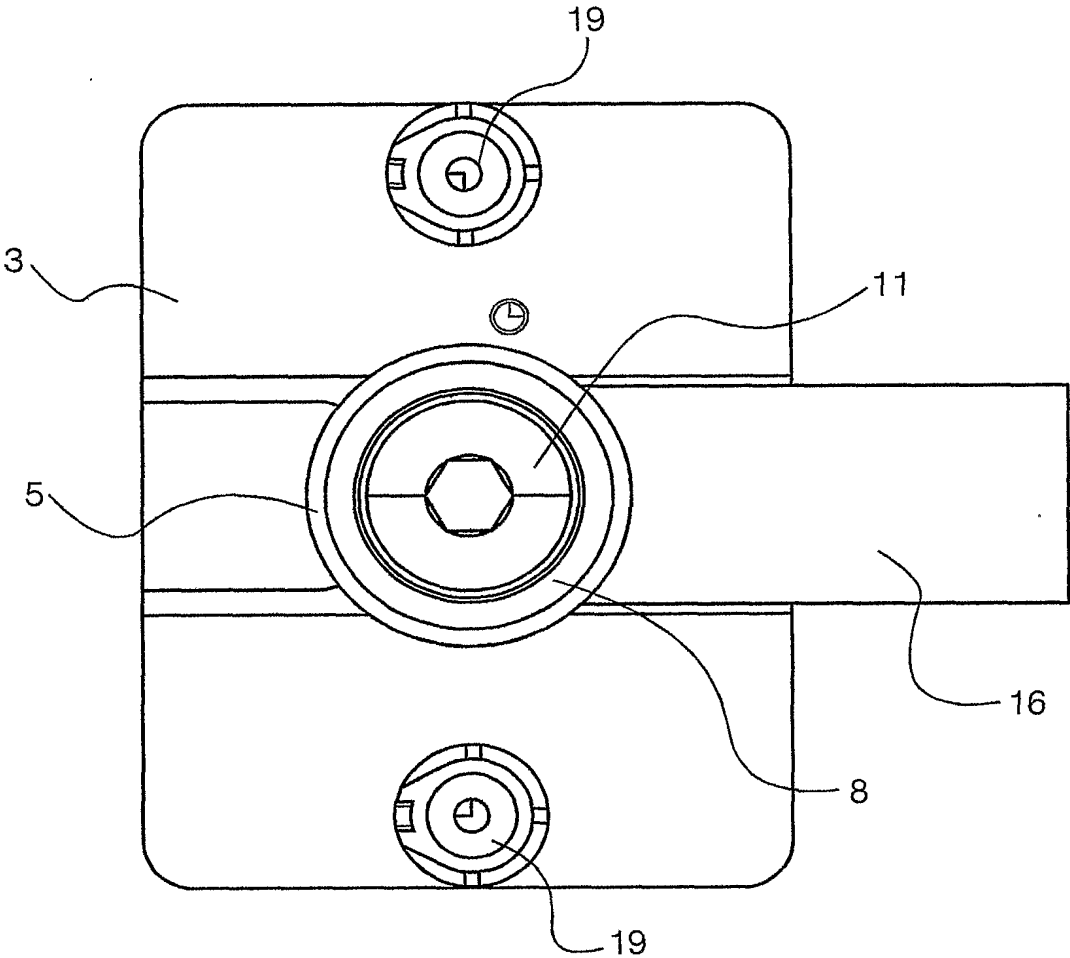


Fig. 6

7/7

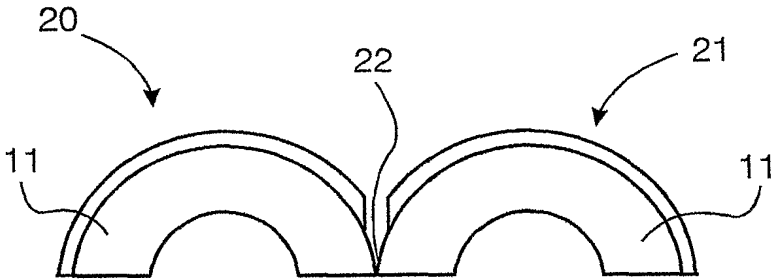


Fig. 7A

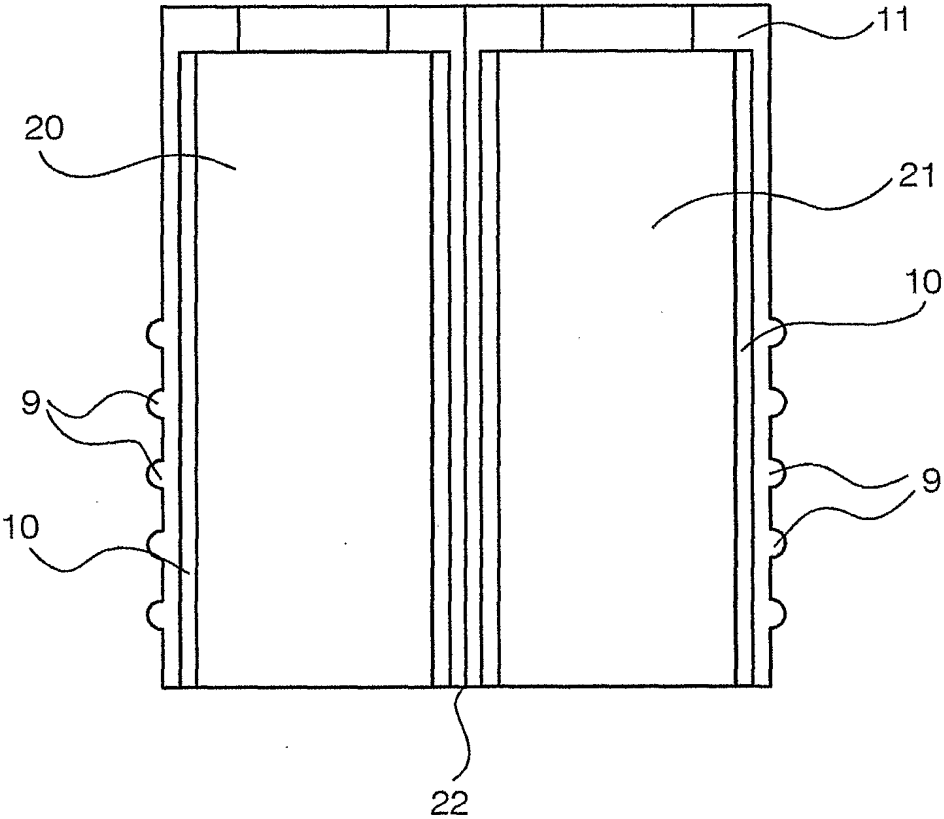


Fig. 7

INTERNATIONAL SEARCH REPORT

Inter: I Application No
PCT/GB 01/05295

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F16L47/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 773 204 A (INNOGE SAM) 2 July 1999 (1999-07-02) page 8, line 10 - line 32; figure 1 ---	1-4
X	FR 2 788 582 A (INNOVATION GENERALE) 21 July 2000 (2000-07-21) page 5, line 16 -page 6, line 21; figure 1 ---	1-4
A	DE 195 12 591 A (MANIBS SPEZIALARMATUREN) 10 October 1996 (1996-10-10) column 3, line 6 - line 11 column 4, line 14 - line 29; figures ---	1-4
X	EP 0 723 104 A (PLASSON MAAGAN MICHAEL IND LTD) 24 July 1996 (1996-07-24) column 2, line 33 -column 5, line 42; figures 1,2 --- -/--	5,6,9-19

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

20 February 2002

Date of mailing of the international search report

04/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Axelsson, T

INTERNATIONAL SEARCH REPORT

Inter il Application No
PCT/GB 01/05295

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 00 950 A (PUSPAS ARMATUREN GMBH) 18 July 1996 (1996-07-18) column 4, line 30 -column 7, line 8; figures -----	5,6,9-19

INTERNATIONAL SEARCH REPORT

.....nation on patent family members

Inter I Application No

PCT/GB 01/05295

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2773204	A	02-07-1999	FR 2773204 A1	02-07-1999
			AU 2057699 A	26-07-1999
			EP 1042632 A1	11-10-2000
			WO 9935433 A2	15-07-1999
			JP 2001509244 T	10-07-2001
FR 2788582	A	21-07-2000	FR 2788582 A1	21-07-2000
			AU 3054800 A	01-08-2000
			BR 0004234 A	19-12-2000
			EP 1144901 A2	17-10-2001
			WO 0042342 A2	20-07-2000
DE 19512591	A	10-10-1996	DE 19512591 A1	10-10-1996
			AT 167733 T	15-07-1998
			DE 59600293 D1	30-07-1998
			EP 0736718 A1	09-10-1996
EP 0723104	A	24-07-1996	US 5577529 A	26-11-1996
			AT 199589 T	15-03-2001
			AU 702425 B2	18-02-1999
			AU 4080196 A	25-07-1996
			DE 69611942 D1	12-04-2001
			DE 69611942 T2	20-09-2001
			EP 0723104 A2	24-07-1996
			IL 116550 A	06-12-1998
			ZA 9600352 A	01-08-1996
DE 19500950	A	18-07-1996	DE 19500950 A1	18-07-1996

DERWENT-ACC-NO: 2002-481921**DERWENT-WEEK:** 200622*COPYRIGHT 2008 DERWENT INFORMATION LTD*

TITLE: Tap fitting for plastic pipes, has direct seal provided between housing and cutter assembly, regardless of axial position of cutter assembly within housing

INVENTOR: BOWMAN B A; BOWMAN J ; CHRISTODOULOU J ;
CHRISTODOULOU M J

PATENT-ASSIGNEE: UPONOR INNOVATION AB[UPONN] , UPONOR
LTD[UPONN]

PRIORITY-DATA: 2000GB-029037 (November 29, 2000)

PATENT-FAMILY:

PUB-NO	PUB-DATE	LANGUAGE
GB 2369662 A	June 5, 2002	EN
WO 0244608 A1	June 6, 2002	EN
AU 200220851 A	June 11, 2002	EN
BR 200115710 A	September 2, 2003	PT
EP 1350054 A1	October 8, 2003	EN
JP 2004514862 W	May 20, 2004	JA
CN 1478186 A	February 25, 2004	ZH
MX 2003004786 A1	October 1, 2003	ES
EP 1350054 B1	November 10, 2004	EN
DE 60107117 E	December 16, 2004	DE
ES 2231582 T3	May 16, 2005	ES
US 6907896 B1	June 21, 2005	EN
DE 60107117 T2	November 10, 2005	DE
CN 1189691 C	February 16, 2005	ZH

DESIGNATED-STATES : AE AG AL AM AT AU AZ BA BB BG BR BY
 BZ CA CH CN CO CR CU CZ DE DK DM DZ
 EC EE ES FI GB GD GE GH GM HR HU ID
 IL IN IS JP KE KG KP KR KZ LC LK LR
 LS LT LU LV MA MD MG MK MN MW MX MZ
 NO NZ OM PH PL PT RO RU SD SE S G SI
 SK SL TJ TM TR TT TZ UA UG US UZ VN
 YU ZA ZM ZW AT BE CH CY DE DK EA ES
 FI FR GB GH GM GR IE IT KE LS LU MC
 MW MZ NL OA PT SD SE SL SZ TR TZ UG
 ZM ZW AL AT BE CH CY DE DK ES FI FR
 GB GR IE IT LI LT LU LV MC MK NL PT
 RO SE SI TR AT BE CH CY DE DK ES F I
 FR GB GR IE IT LI LU MC NL PT SE TR

APPLICATION-DATA:

PUB-NO	APPL- DESCRIPTOR	APPL-NO	APPL-DATE
GB 2369662A	N/A	2000GB- 029037	November 29, 2000
BR 200115710A	N/A	2001BR- 015710	November 29, 2001
CN 1478186A	N/A	2001CN- 819618	November 29, 2001
CN 1189691C	N/A	2001CN- 819618	November 29, 2001
DE 60107117E	N/A	2001DE- 607117	November 29, 2001
DE 60107117T2	N/A	2001DE- 607117	November 29, 2001
EP 1350054A1	N/A	2001EP- 998766	November 29, 2001
EP 1350054B1	N/A	2001EP- 998766	November 29, 2001
WO2002044608A1	N/A	2001WO- GB05295	November 29, 2001

BR 200115710A	N/A	2001WO- GB05295	November 29, 2001
EP 1350054A1	N/A	2001WO- GB05295	November 29, 2001
JP2004514862W	N/A	2001WO- GB05295	November 29, 2001
MX2003004786A1	N/A	2001WO- GB05295	November 29, 2001
EP 1350054B1	N/A	2001WO- GB05295	November 29, 2001
DE 60107117E	N/A	2001WO- GB05295	November 29, 2001
US 6907896B1	N/A	2001WO- GB05295	November 29, 2001
DE 60107117T2	N/A	2001WO- GB05295	November 29, 2001
AU 200220851A	N/A	2002AU- 020851	November 29, 2001
JP2004514862W	N/A	2002JP- 546114	November 29, 2001
MX2003004786A1	N/A	2003MX- 004786	May 29, 2003
US 6907896B1	Based on	2003US- 416903	September 4, 2003

INT-CL-CURRENT :

TYPE	IPC DATE
CIPP	F16L41/06 20060101
CIPS	F16L47/03 20060101
CIPS	F16L47/28 20060101

ABSTRACTED-PUB-NO: GB 2369662 A

BASIC-ABSTRACT:

NOVELTY - A cutting blade (14) in the cutter assembly, engages the surface of a pipe (P) to which the tap fitting is attached. A direct seal (23) is provided between the housing (2) and the cutter assembly regardless of the axial position of the cutter assembly within the housing.

DESCRIPTION - An INDEPENDENT CLAIM is included for insert for tap fitting.

USE - For use with plastic pipe.

ADVANTAGE - The stack is not subjected to the stresses imposed by the pressurized gas or liquid in the main pipe, because sealing is provided under the stack. Provides an extended fitting reliability for a given pressure, or the ability to use a thinner wall section in the stack.

DESCRIPTION OF DRAWING(S) - The figures show cross-sectional side view of fitting and enlarged view of seal.

Housing (2)

Cutting blade (14)

Seal (23)

Pipe (P)

CHOSEN-DRAWING: Dwg. 4, 4A/7

TITLE-TERMS: TAP FIT PLASTIC PIPE DIRECT SEAL
HOUSING CUT ASSEMBLE AXIS POSITION

DERWENT-CLASS: A88 Q66 Q67

CPI-CODES: A99-A;

ENHANCED-POLYMER-INDEXING: Polymer Index [1.1] 018 ;
P0000;

Polymer Index [1.2] 018 ;
ND01; Q9999 Q8731 Q8719;
Q9999 Q8720 Q8719;

SECONDARY-ACC-NO:

CPI Secondary Accession Numbers: 2002-137138

Non-CPI Secondary Accession Numbers: 2002-380715